


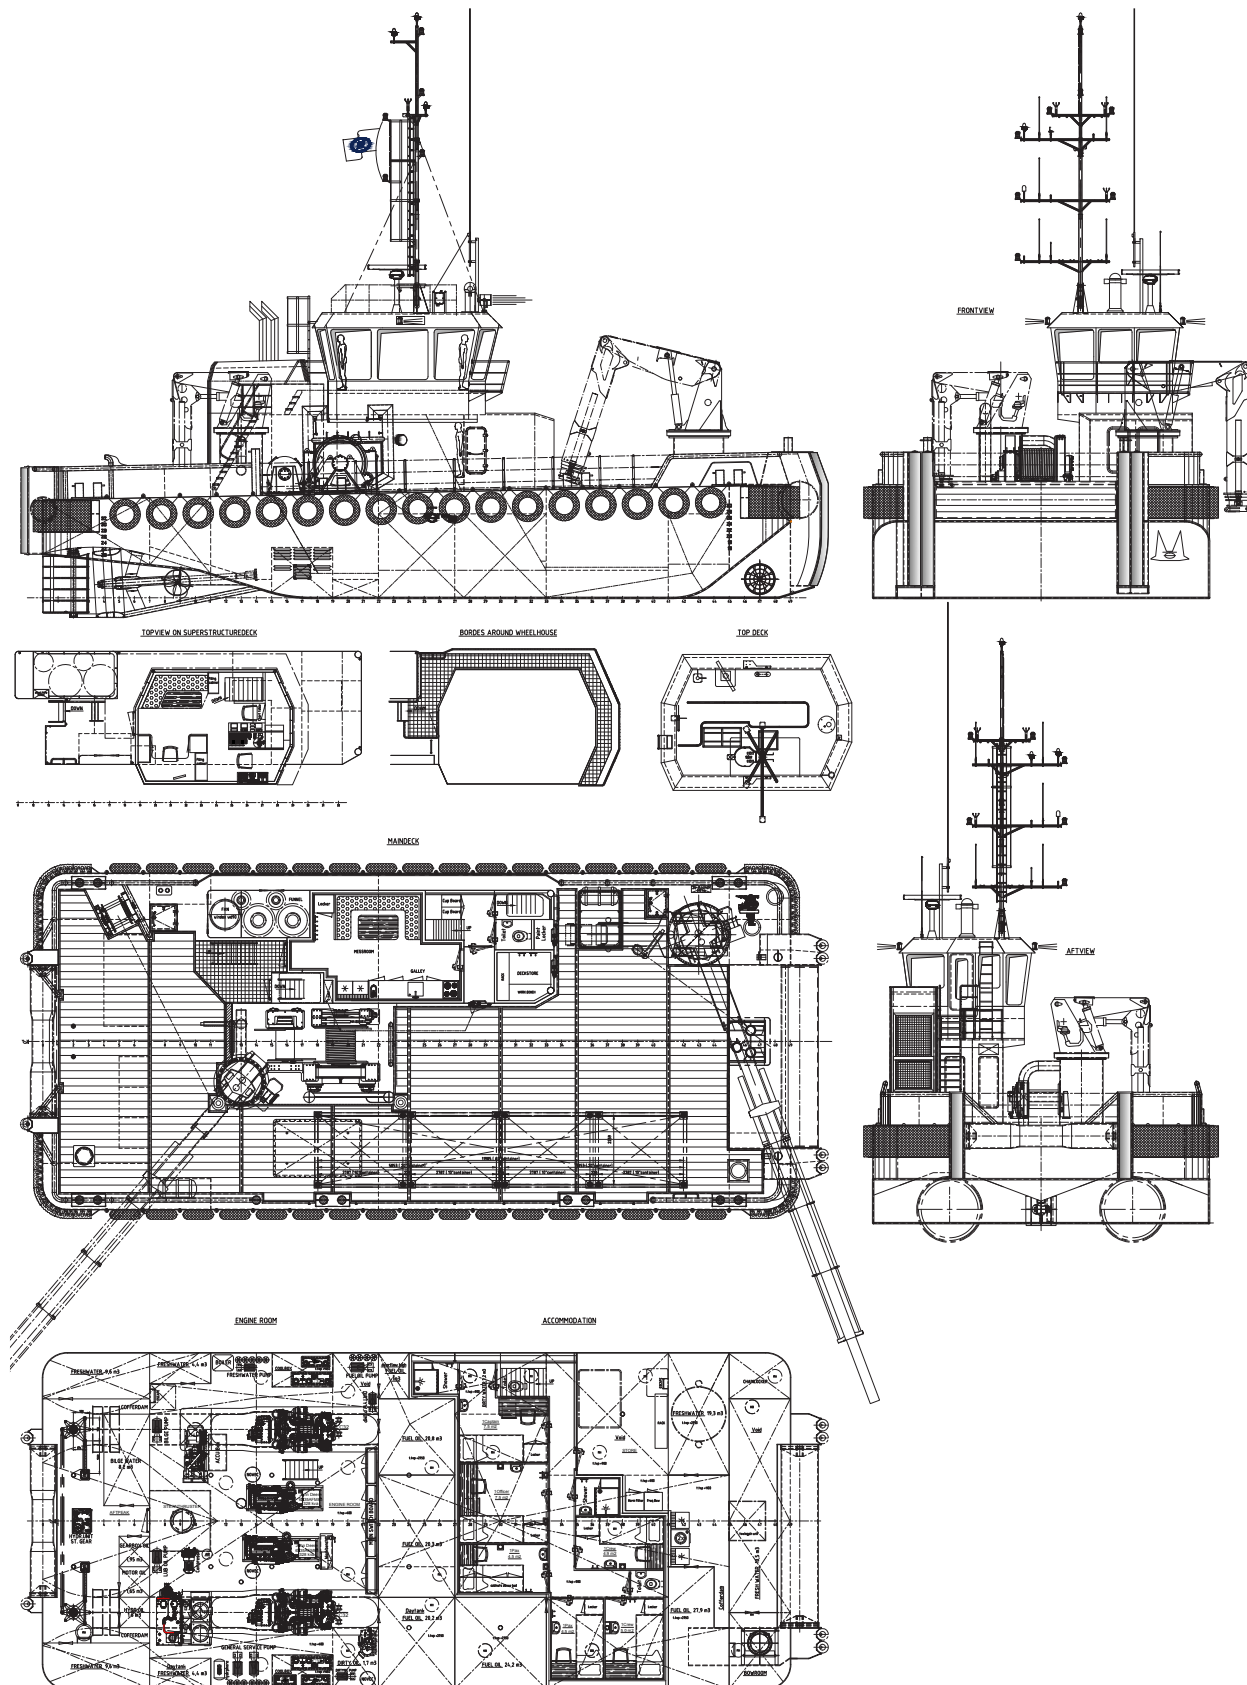
## EuroCarrier 2611 | Workboat



The robust, efficient and flexible design of the EuroCarrier makes it one of the best vessels for anchor handling, dredging support and survey activities. The EuroCarrier can be adapted to perfectly fit any project within a short time.



<b>CLASSIFICATION</b>	Bureau Veritas    HULL • MACH Unrestricted Navigation, Multi-Purpose Ship / Special Service GMDSS Area A2	<b>TANKS</b>	
		FUEL OIL	107 m <sup>3</sup>
		FRESH WATER	60 m <sup>3</sup>
<b>DIMENSIONS</b>		<b>DECK LAY-OUT</b>	
LENGTH O.A.	26,48 meters	ANCHOR HANDLING WINCH	150 tons holding force
BREADTH MLD.	11,00 meters	PULLING FORCE	100 tons at 1 <sup>st</sup> layer
DEPTH AT SIDE	3,50/3,70 meters	HAULING SPEED	up to 20m/min
DRAFT	2,93 meters	TOWING WINCH	60 tons holding force
GROSS TONNAGE	255	PULLING FORCE	50 tons at 1 <sup>st</sup> layer
NET TONNAGE	76	HAULING SPEED	10m/min – 20m/min
RULE LENGTH	23.6 meters	TUGGER WINCH	15 tons at 1 <sup>st</sup> layer
<b>PERFORMANCES</b>		DECK CRANE FORWARD	Heila HLRM 230-4SL
SPEED	10.8 knots	DECK CRANE AFT	Heila HLRM 140-3SL
BOLLARD PULL	Approx. 35 tons	DECK	Azobé deck covering
<b>PROPULSION</b>		TOWING HOOK	Mampaey 45 tons SWL
MAIN ENGINES	2x Caterpillar C32 ACERT	TOWING PINS	Aft ship: manual set, fore ship: hydraulic set + chain stopper
TOTAL POWER	1940 kW at 1800 RPM	<b>ACCOMMODATION</b>	
PROPELLERS	1850 mm diameter in nozzle	FACILITIES	Airconditioned accommodation for up to 6 persons
<b>AUXILIARIES</b>		<b>OPTIONS</b>	
GENERATOR SETS	2x John Deere, 6135 1x John Deere, 4045 (radiator cooled)	4-POINT MOORING SYSTEM	4 hydraulic winches and anchors
TOTAL E-POWER	2x 262 kw, 1x 81.6 kw	SHARK JAWS	Triplex type
HYDRAULIC POWER PACK	2x 90 kW	CAPSTANS	5 ton, hydraulic driven
BOW THRUSTER	Tunnel thruster in SB pushbow, 250 kW	DYNAMIC POSITIONING	Class 1
		FENDERING	Azobe side, M-fendering on the sides, fendering pusbow fendering fore-and aft ship
		CARGO RAILS	ø 140 mm pipe forward and side of superstructure



## EuroCarrier 2611 | Workboat

For more information, please contact us on:

T +31 (0)184 621 423 E [info@neptunemarine.com](mailto:info@neptunemarine.com) W [www.neptunemarine.com](http://www.neptunemarine.com)

Version: V.02

