



The EuroSupporter is based on years of operational experience within the maritime industry. The maximum free deck space combined with the versatile design, makes the vessel an all-round support vessel for aquaculture operations.











CLASSIFICATION	Bureau Veritas I 承 HULL • MACH • AUT- UMS, Unrestricted Nav., Multi-Purpose / Special Service, GMDSS Area A2
DIMENSIONS	
LENGTH O.A.	40,30 meter
BREADTH MLD.	12,00 meters
DEPTH AT SIDE	3,50 meters
DRAFT	2,25 meters
PERFORMANCES	
SPEED	10.0 knots
BOLLARD PULL	12 tons
PROPULSION	
MAIN ENGINES	Azimuth L Drive 400 kW
MOTOR	Integrated PM e-motor
PROPELLERS	1130 mm diameter in nozzle
AUXILIARIES	
GENERATOR SETS	3x Scania D16 075M
GENERATOR POWER	3x 555 ekW, 60 Hz
BOW THRUSTER	Steering grit type 191 kW at 1800 rpm
HYDRAULIC POWERPACK	Electrical driven


TANKS	
FUEL OIL	86 m³ (free from shell)
FRESH WATER	220 m³ (including trimwater)
DECK LAY-OUT	
FREE DECK SPACE	170 m²
DECK CRANE	3 x Hydraulic knuckle boom type HS Marine AK 48/18.5 E5 9 ton @ 3,4 m 1,1 ton @ 18,5 m
CAPSTANS	2 x 5 ton, hydraulic driven
FENDERING	Fendering on the sides
FISH RELATED EQUIPMENT	T
DE-LICE EQUIPMENT	Integrated 2-line Hydrolicer system
A-FRAME	removable type at the stern
HIGH PRESSURE WASHING SYSTEM	hot/cold water, 2 hoses on deck
ACCOMMODATION	
FACILITIES	Air-conditioned accommodation for 6 crew members.
OPTIONAL ITEMS	
MANOEUVRING	DP 1 system
GMDSS	A3
TOWING WINCH	30 tons
PROPULSION	IMO Tier III compliant





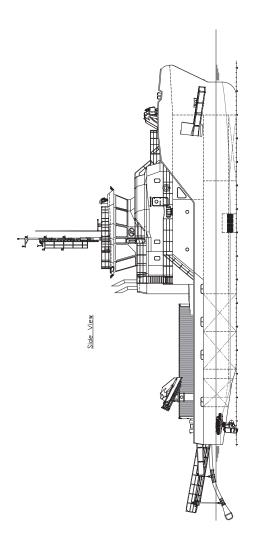

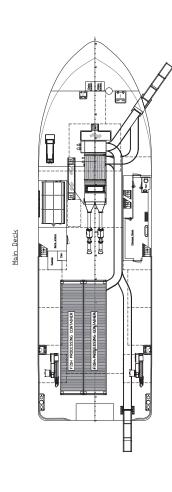

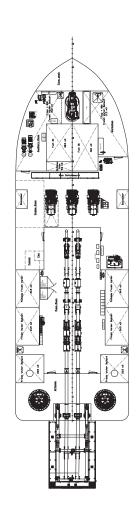

EuroSupporter 4012 | Aquaculture Support