




EuroTug 3515 | Shallow draft tugboat



Euro Tugs have proven their versatility and robustness at sea, over the years. The maximum free deck space for this type of multipurpose tugboat offers many possibilities for all kinds of operations including towing, anchor handling, dredging support and wind farm support.



CLASSIFICATION	Bureau Veritas I ✕ HULL • MACH • AUT-UMS, TUG, Unrestricted Navigation, DYNAPOS AM/AT R, GMDSS Area A3	
DIMENSIONS		
LENGTH O.A.	35,60 meters	
BREADTH MLD.	15,00 meters	
DEPTH AT SIDE	2,90 meters	
DRAFT	1,50 meters	
GROSS TONNAGE	496	
NET TONNAGE	147	
PERFORMANCES		
SPEED	10 knots	
BOLLARD PULL	32 tons	
PROPULSION		
MAIN ENGINES	3x Caterpillar C32	
TOTAL POWER MAIN ENGINE	2910 kW at 1800 rpm	
PROPELLERS	1500 mm in nozzle	
AUXILIARIES		
GENERATOR SETS	3x Caterpillar C9 1x Caterpillar C32	
TOTAL E-POWER	1320 kW	
HYDRAULIC POWER PACK	2x90 kW (electrical driven)	
BOW THRUSTERS	2 x 275 kW (electrical driven)	
STERN THRUSTERS	2 x 275 kW (electrical driven)	
TANKS		
FUEL OIL	180 m ³	
FRESH WATER	85 m ³	
DECK LAY-OUT		
ANCHOR HANDLING / TOWING WINCH	Waterfall winch type	
ANCHOR HANDLING	125 ton holding force	
PULLING FORCE	100 ton at 1 st layer	
HAULING SPEED	5m/min-10m/min	
TOWING WINCH	125 ton holding force	
PULLING FORCE	50 ton at 1 st layer	
HAULING SPEED	10m/min-20m/min	
DECK CRANE	Heila HLRM 230-4SL	
DECK	Azobé deck covering	
TOWING HOOK	Mampaey 35 tons SWL Disc	
FENDERING	Tire-and optional D-fendering on the side, pusbow fendering fore ship, D-fendering aft ship	
ACCOMMODATION		
FACILITIES	Airconditioned accommodation for up to 21 persons	
OPTIONS		
TUGGER WINCH	15 ton at 1st layer	
TOWING PINS	Aft ship set + chain stopper	
MOORING SYSTEM	4-point mooring system	

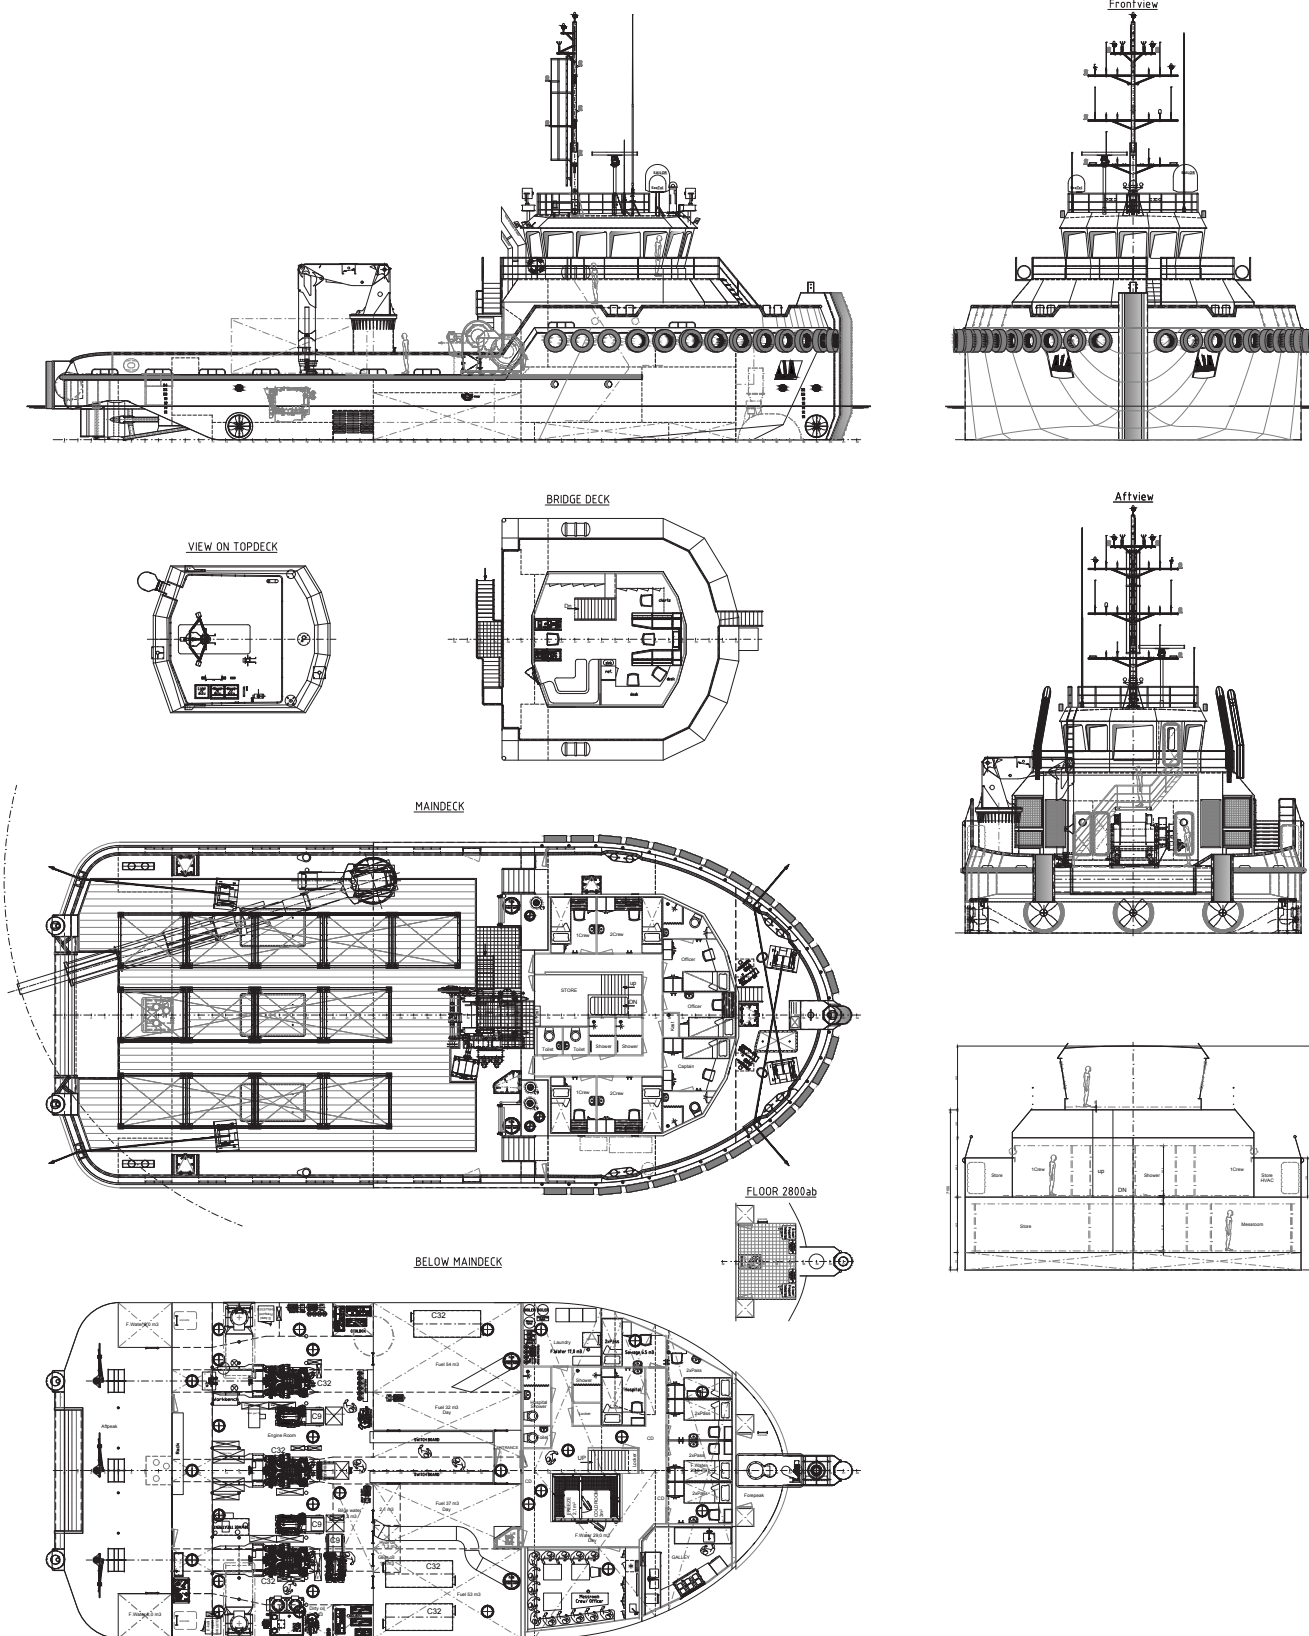

EuroTug 3515 | Shallow draft tugboat

For more information, please contact us on:

T +31 (0)184 621 423 E info@neptunemarine.com W www.neptunemarine.com

Version: V.01

