
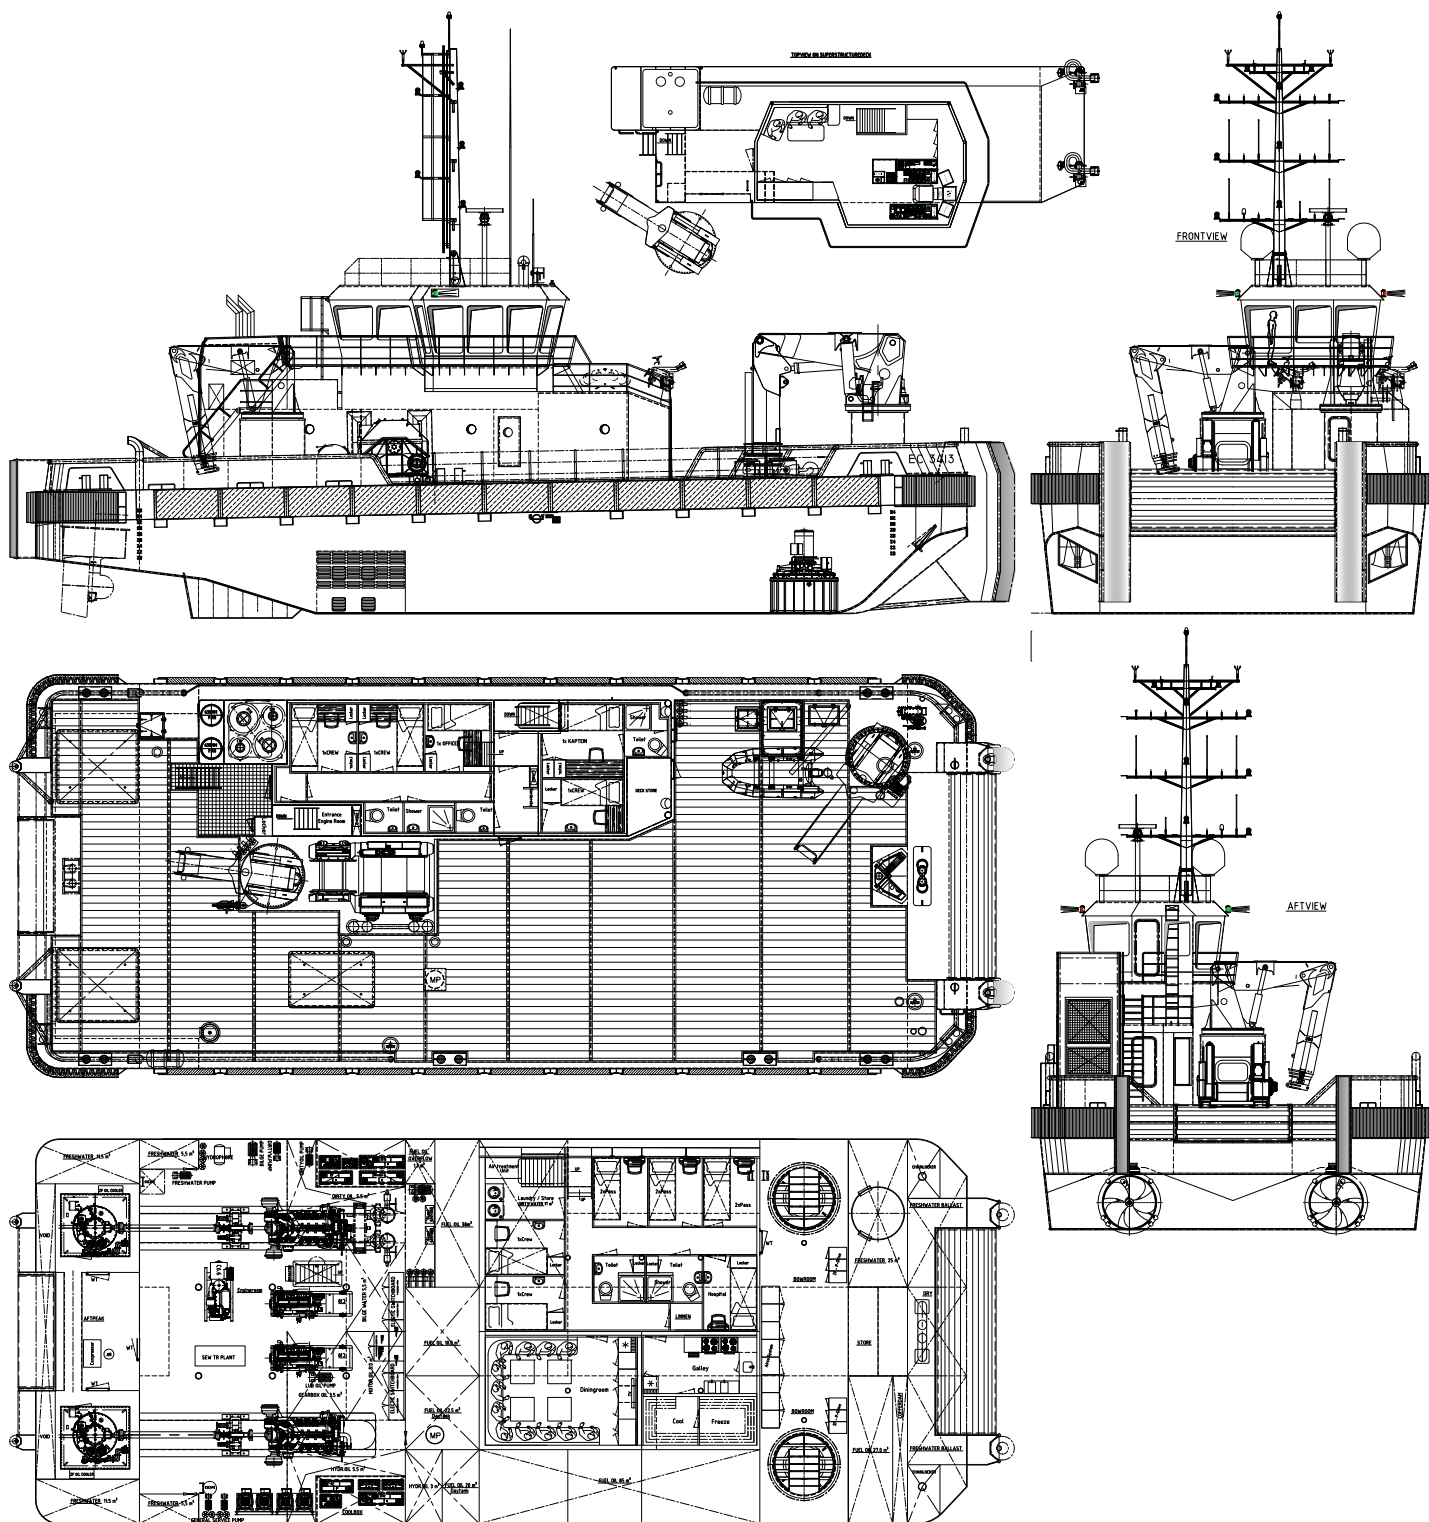




The robust, efficient and flexible design of the EuroCarrier makes it one of the best vessels for anchor handling, dredging support and survey activities. The EuroCarrier can be adapted to perfectly fit any project within a short time.



CLASSIFICATION		Bureau Veritas I  HULL • MACH • AUT-UMS, Unrestricted Navigation, Multi-Purpose / Special Service GMDSS Area A3	
DIMENSIONS			
LENGTH O.A.	34,00 meters		
BREADTH MLD.	13,00 meters		
DEPTH AT SIDE	4,00/4,40 meters		
DRAFT	3,00 meters		
GROSS TONNAGE	499		
NET TONNAGE	149		
PERFORMANCES			
SPEED	11 knots		
BOLLARD PULL	36 tons		
PROPULSION			
MAIN ENGINES	2x Caterpillar 3512		
TOTAL POWER	2388 kW at 1600 RPM		
THRUSTERS	2x ZF6311 1140kW 360°		
AUXILIARIES			
GENERATOR SETS	2x Caterpillar C18 1x Caterpillar C6.6		
TOTAL E-POWER	1020 kW		
HYDRAULIC POWER PACK	4x 90 kW		
BOW THRUSTER	2x ZF4010 330 kW 360°		
TANKS			
FUEL OIL	220 m³		
FRESH WATER	61 m³		
DECK LAY-OUT			
ANCHOR HANDLING WINCH	190 tons holding force		
PULLING FORCE	125 tons at 1 st layer		
HAULING SPEED	10m/min – 20m/min		
TOWING WINCH	60 tons holding force		
PULLING FORCE	50 tons at 1 st layer		
HAULING SPEED	10m/min – 20m/min		
TUGGER WINCH	15 tons at 1 st layer		
DECK CRANE FORWARD	Heila HLRM 340-2S		
DECK CRANE AFT	Heila HLRM 230-3S		
DECK	Azobé deck covering		
TOWING HOOK	Mampaey 45 tons SWL		
TOWING PINS	Aft ship: manual set, fore ship: hydraulic set + chain stopper		
FENDERING	Tire- and M-fendering on the side, pushbow fendering fore- and aft ship		
ACCOMMODATION			
FACILITIES	Airconditioned accommodation for up to 19 persons		
OPTIONS			
DYNAMIC POSITIONING	Class 2		
4-POINT MOORING SYSTEM	4 hydraulic winches and anchors		
SHARK JAWS	Triplex type		
CAPSTANS	5 ton, hydraulic driven		



EuroCarrier 3413 | Workboat

For more information, please contact us on:

T +31 (0)184 621 423 E info@neptunemarine.com W www.neptunemarine.com

Version: V.01

