




The EuroTrader 5000 is optimized for transporting dry cargo such as bulk, forest products, project cargo, breakbulk and general cargo. In the design process special attention was paid to the underwater shape, resulting in low fuel consumption and good seakeeping, excellent ratio of the main dimension and high hold volume.








CLASSIFICATION	
DIMENSIONS	
LENGTH O.A.	89,52 meters
LENGTH B.P.P.	84,99 meters
BREADTH	14,72 meters
DEPTH	6,60 meters
DRAUGHT MAX	5,70 meters
DWT AT MAX DRAUGHT	4980 ton
GROSS TONNAGE	<3000 ton
CAPACITIES	
HOLD	6350 m³
	224000 cuft
BALLAST WATER	1600 m³
PORTABLE WATER	50 m³
FUEL OIL	235 m³
PERFORMANCE	
SERVICE SPEED	11 knots
PROPULSION	
MAIN ENGINE	Wärtsilä 6L20
	1200 kW @ 1000 rpm
CPP IN NOZZLE	2800 mm
BOWTHRUSTER	300 kW, electric driven. fixed pitch

DECK EQUIPMENT	
WINCHES	1 pc elec/hydr anchor mooring, single
	drum, two warping heads
	1 pc elec capstan on poopdeck
<b>AUXILIARY EQUIPMENT</b>	
GENERATOR	1 pc aux generator 200 kW
	1 pc emergency generator 80 kW
ALTERNATOR	1 pc PTO 300 kW
HOLD HATCHCOVERS	
HATCHCOVERS	Pontoon type, watertight, grain hatches integrated
GRAIN BULKHEADS	1 pc grain bulkheads
HANDLING	Elec. gantrycrane
ACCOMODATION	
	8 person accomodation

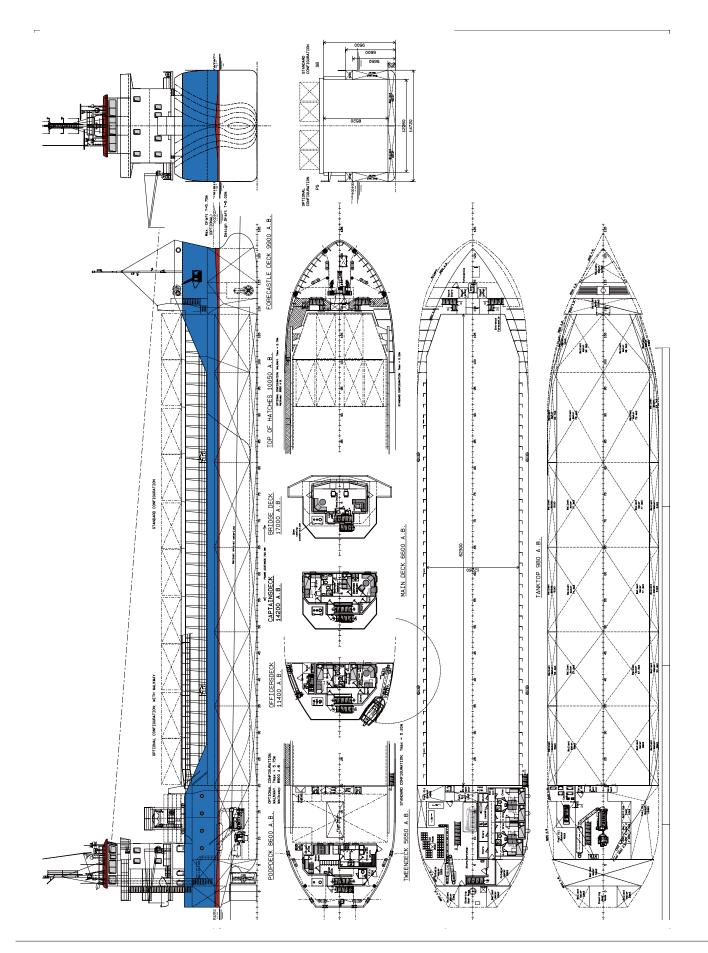

## **EuroTrader 5000** | Coastal Trader

