



The EuroWid is based on years of operational experience within the maritime industry. The excellent manouvrability, combined with the integrated jetting system, gives the EuroWid optimal dredging capacities.








CLASSIFICATION	Bureau Veritas I ★ HULL • MACH • AUT-UMS, TUG, Unrestricted Navigation, GMDSS Area A3
DIMENSIONS	
LENGTH O.A.	27,53 meters
BREADTH MLD.	10,00 meters
DEPTH AT SIDE	3,55 meters
DRAFT	3,00 meters
PERFORMANCES	
SPEED	10 knots
BOLLARD PULL	Approx. 25 tons
DREDGING DEPTH	20,00 meters
PROPULSION	
MAIN ENGINES	2x MAN D2862 IMO Tier III
TOTAL POWER	2x 735 kW at 1800 RPM
PROPELLERS	1750 mm in nozzle
AUXILIARIES	
GENERATOR SETS	2x Volvo D7A 130 kvA
TOTAL E-POWER	260 kvA
HYDRAULIC POWER PACK	2x 55 kW
BOW THRUSTER	150 kW tunnel (electric)

TANKS	
FUEL OIL	110 m³
UREA	10 m <sup>3</sup>
FRESH WATER	30 m <sup>3</sup>
DECK LAY-OUT / EQUIPMENT	
JETPUMP	1000 m³/h 2 bar
JETPUMP ENGINE	MAN D2862 735 kW
A-FRAME	2x including deico
WINCH	2x Hydraulic driven
WATER INJECTION	U Bar with adjustable nozzles
DECK CRANE	Heila HLRM 25-3S
DECK	Azobé deck covering
FENDERING	Fenderframes for protecting WID pipe
ACCOMMODATION	
FACILITIES	Airconditioned accommodation for up to 6 persons
OPTIONS	
TUGGER WINCH	15 ton at 1 <sup>st</sup> layer
TOWING PINS	Aft ship set + chain stopper
DECK CRANE	Heila HLRM 140-3S

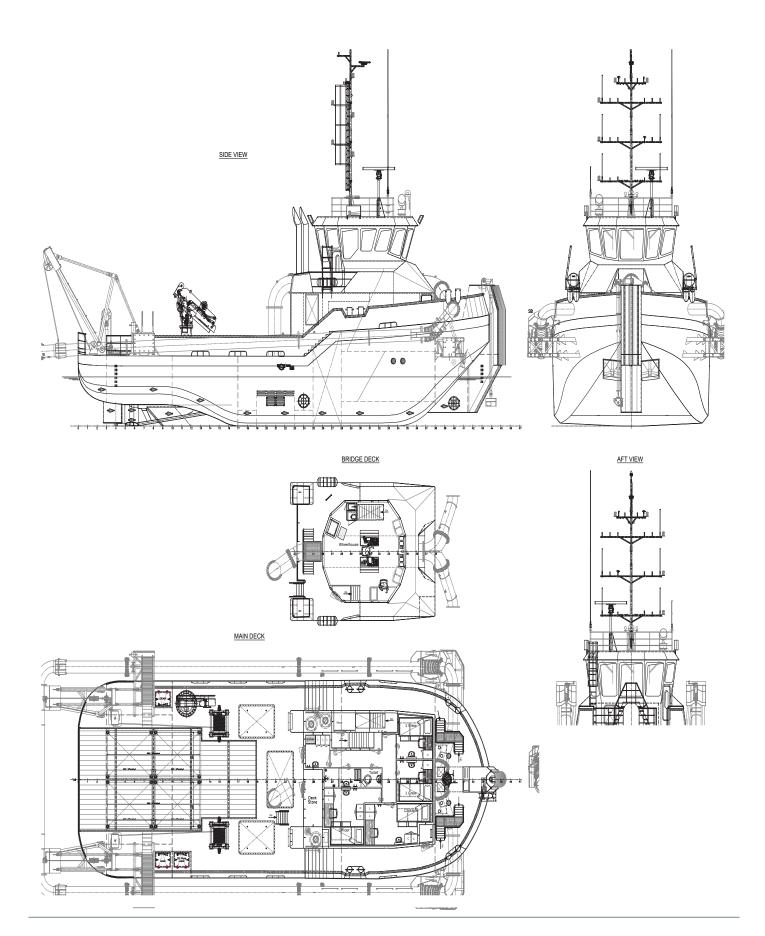

**EuroWid 2710** | Water Injection Dredger

